

# Tinuvin® XT 55

New HALS for Polyethylene Tapes and Monofilaments  
Combines Improved Processing with Excellent Stability

 **BASF**  
We create chemistry



## Advanced HALS with balanced properties combining:

- State-of-the-art Water Carry Over behavior
- Increased efficiency in production
- Outstanding light and thermal stability
- Easy to handle product form
- Excellent color stability
- Prolonged end product life



## Tinuvin® XT 55

### The advanced light stabilizer for polyethylene tape and monofilament applications

Tinuvin® XT 55 is a hindered amine light stabilizer (HALS) with excellent polymer compatibility. It combines exceptionally high UV with long term thermal stability in polyethylene. In comparison to other HALS Tinuvin® XT 55 gives very low contribution to water carry over during production of polyethylene tapes and monofilaments, helping the converter to run the line at high throughput.


### Outstanding in weathering stability

Tinuvin® XT 55 provides high resistance to exposure under UV radiation in both xenon and fluorescence arc conditions. It maintains performance of the end article under most stringent conditions requested by applications standards.

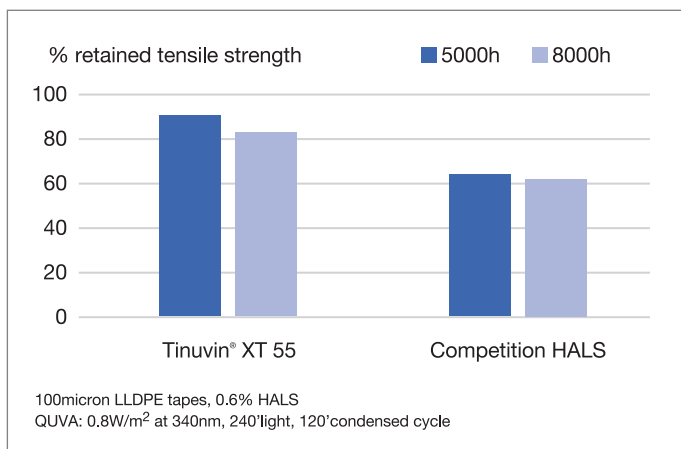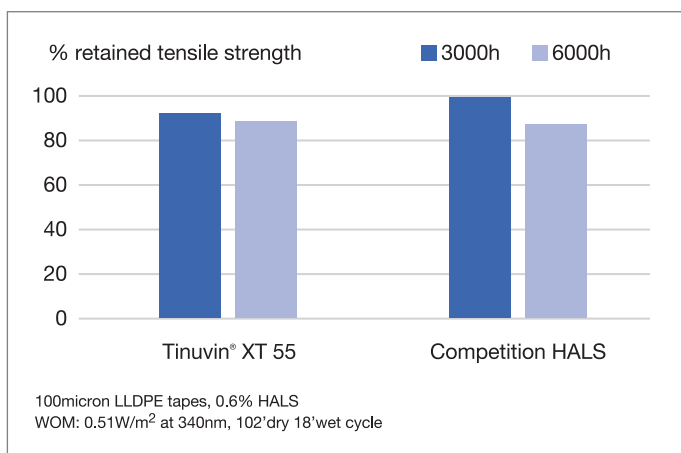


## Excellent water carry over (WCO) properties

Water pick up during processing of monofilaments and tapes can induce fiber breaks and inconsistent drawing causing increased waste and line downtime. Conventional HALS are known to influence WCO in a negative way. Tinuvin® XT 55 contributes significantly less to WCO compared to other HALS.

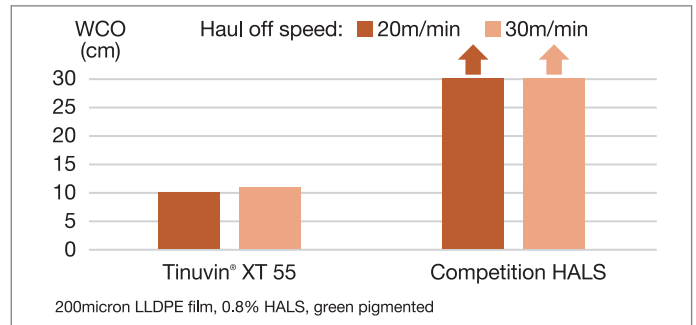


## Versatile product form

Tinuvin® XT 55 is supplied as attrition resistant pellets (FB). The product is easy to handle, free flowing and guarantees high working hygiene.

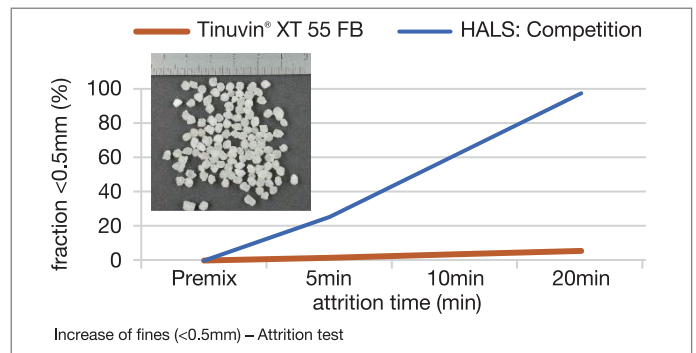

## Very good color retention

Color retention is key in visible applications. Usage temperatures often are as high as 80°C for several hours. Products containing Tinuvin® XT 55 have a lower tendency than other HALS to shift in color when exposed to elevated temperatures.

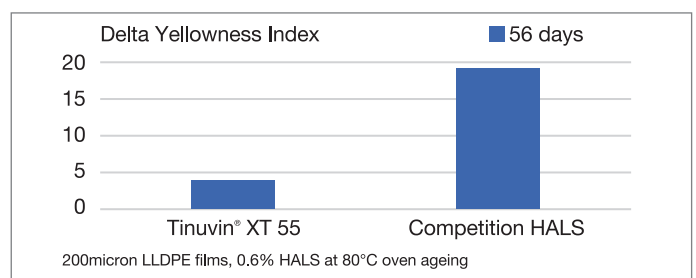

**Asia**  
BASF East Asia  
Regional Headquarters  
Limited  
Plastic Additives  
45th Floor, Jardine House  
No. 1 Connaught Place  
Hong Kong  
Phone: +852 2731-0111

**Europe**  
BASF Lampertheim  
GmbH  
Plastic Additives  
Chemie Strasse 22  
68623 Lampertheim  
Germany  
Phone: +49 621 60-0

**Middle East**  
BASF Plastic Additives  
Middle East S.P.C.,  
Bahrain  
International Investment  
Park (BIIP)  
Road 1518, Al Hidd,  
Kingdom of Bahrain  
Phone: +973 17 585-232  
+973 17 585-235

**North America**  
BASF Corporation  
Plastic Additives  
100 Park Avenue  
Florham Park, NJ 07932  
USA  
Phone: +1 973  
245-6000

**South America**  
BASF S. A.  
Plastic Additives  
Sede Administrativa  
Av. das Nações Unidas  
14.171, Morumbi  
04794-000 São Paulo, SP  
Brasil  
Phone: +55 11  
2039-2797

[www.plasticadditives.basf.com](http://www.plasticadditives.basf.com)

#### Note

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, designs, data or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information given in this publication may change without prior information. The descriptions, designs, data and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained, all such being given and accepted at the reader's risk. (08/2016)

© = registered trademark of BASF SE